


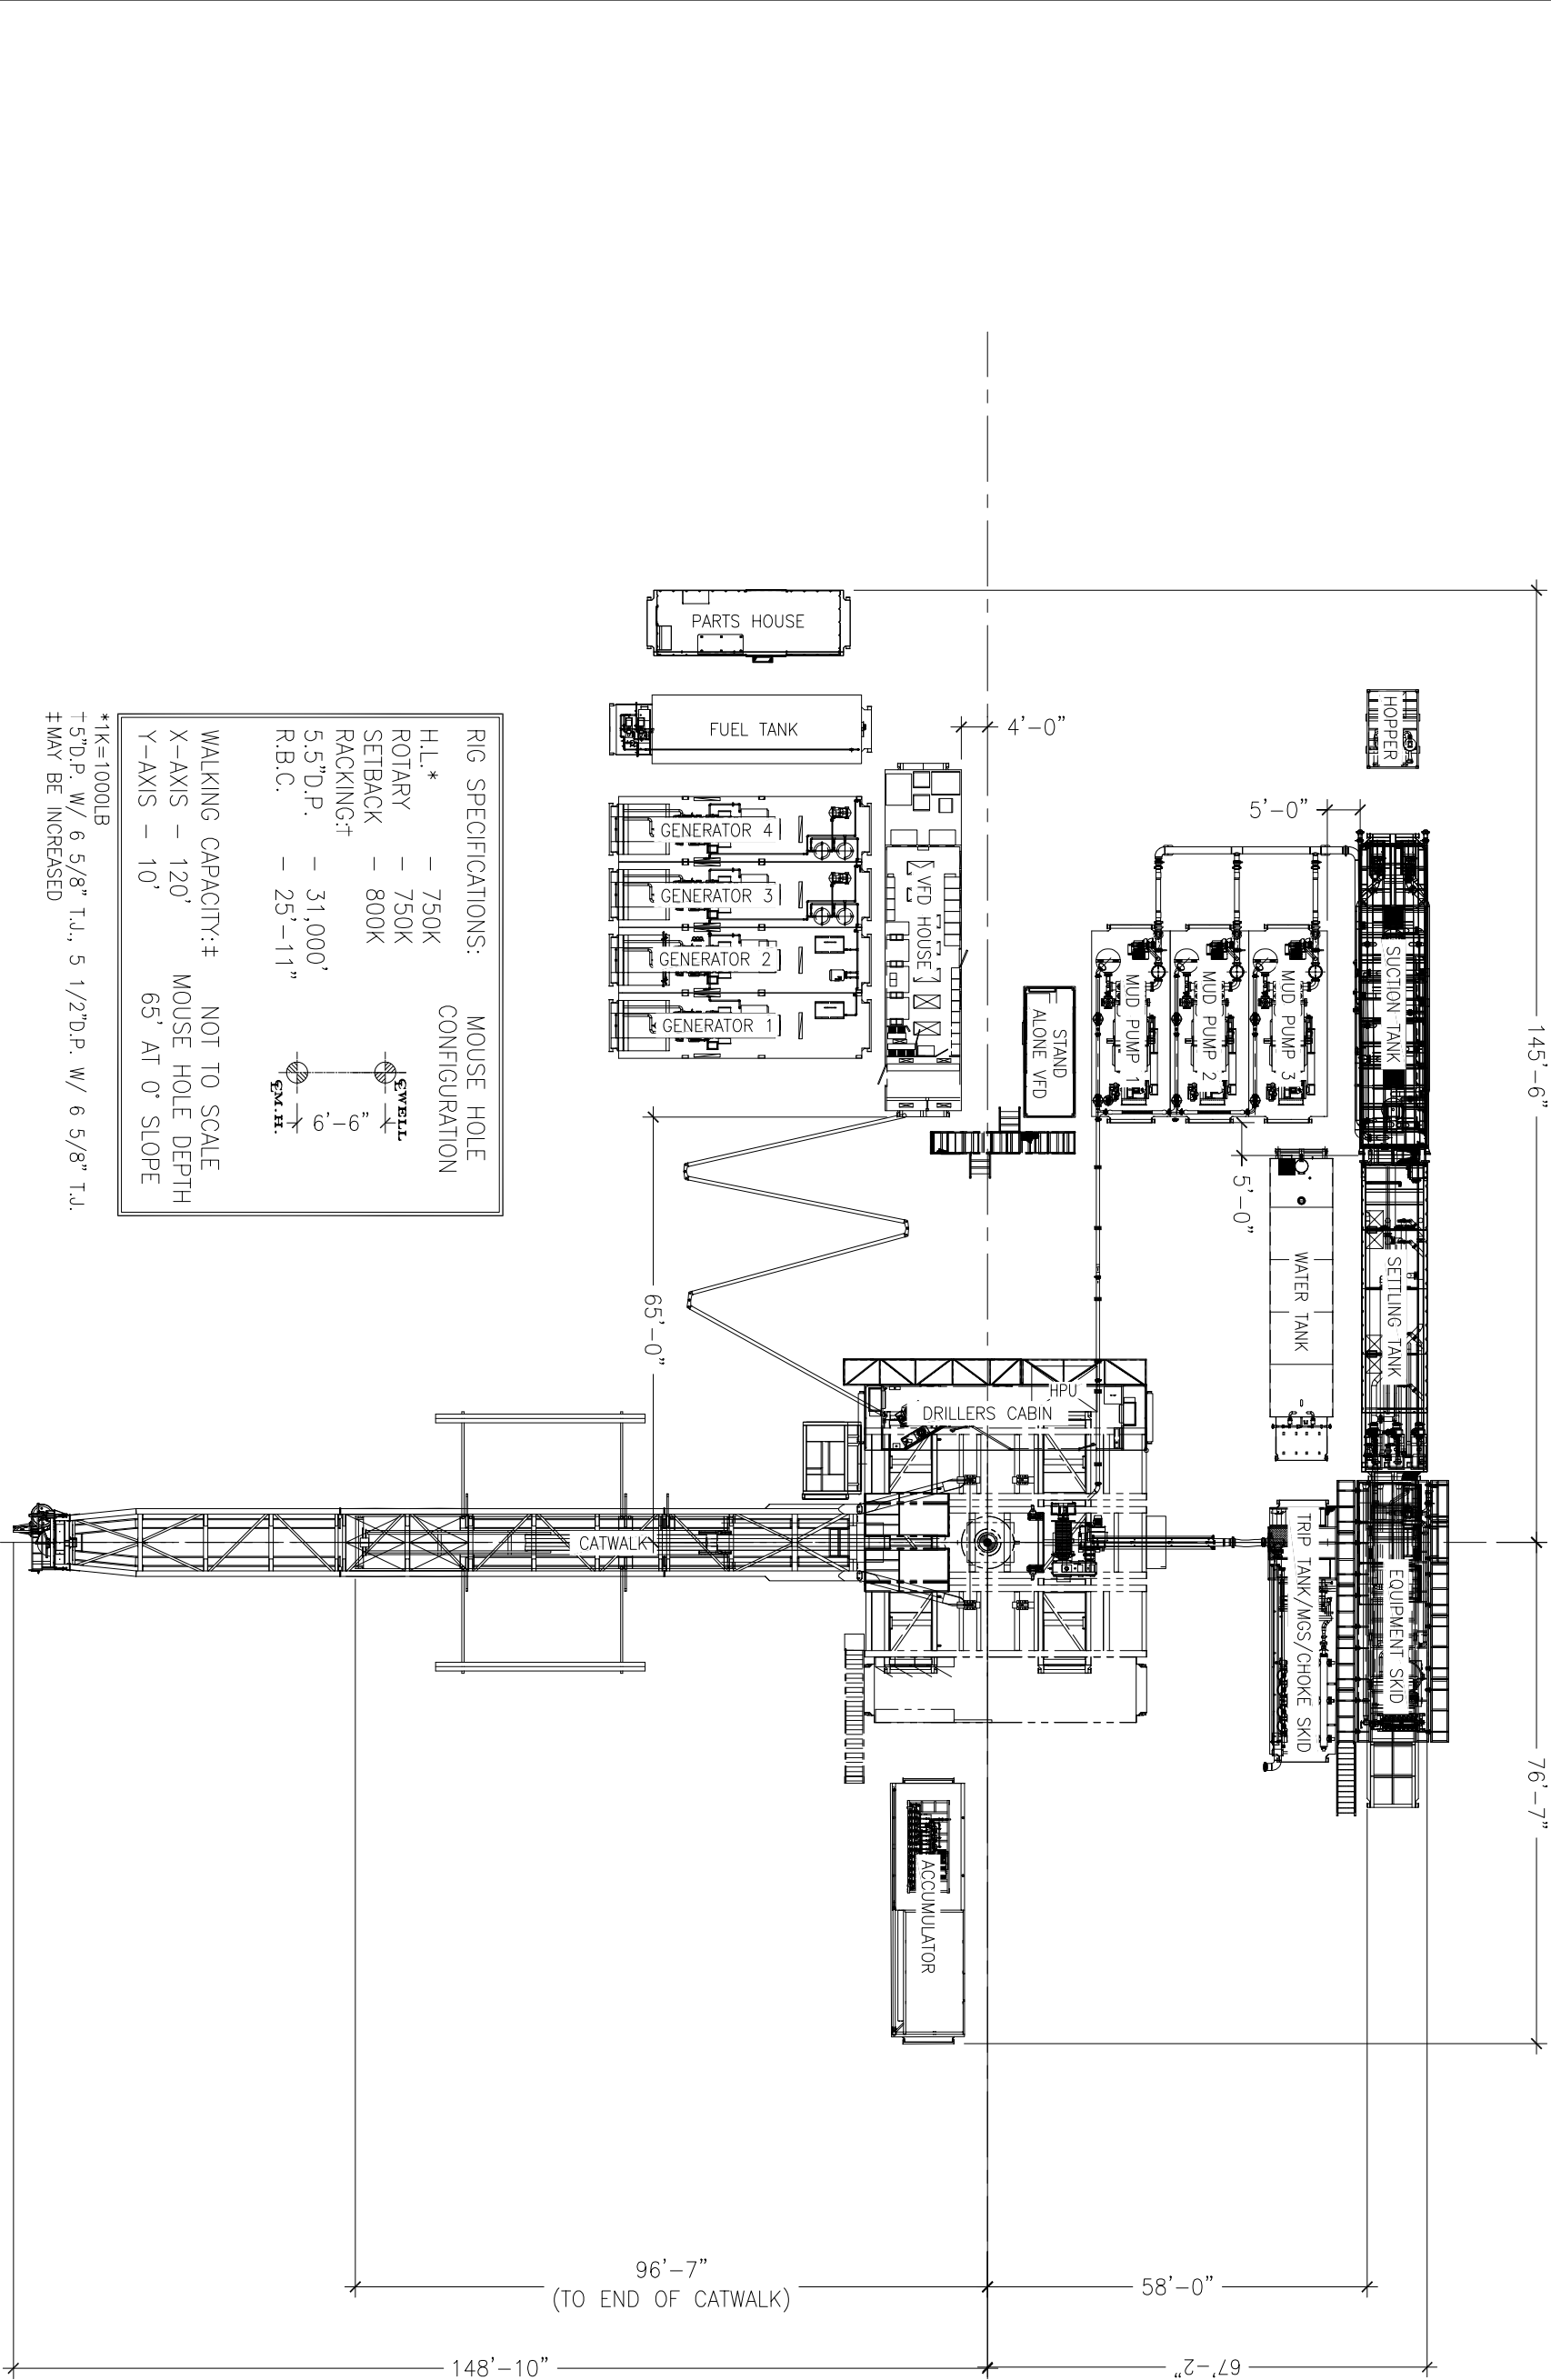

RIG SPECIFICATIONS:

H.L.*
ROTARY
SETBACK
RACKING:†
5.5"D.P.
R.B.C.

— 750K
— 750K
— 800K
— 31,000'
— 25'-11"

MOUSE HOLE
CONFIGURATION

1/2" HOLE
1/2" DIA.
1/2" DIA.

WALKING CAPACITY:‡

NOT TO SCALE

MOUSE HOLE DEPTH
65' AT 0° SLOPE

*1K=1000LB
†5"D.P. W/ 6 5/8" T.J., 5 1/2"D.P. W/ 6 5/8" T.J.
‡ MAY BE INCREASED

REVISION HISTORY						UNSPECIFIED TOLERANCES			PROPRIETARY INFORMATION		CONTACT INFORMATION		DRAWN BY:		DATE:		RIG 304		EQUIPMENT LAYOUT		GENERAL ARRANGEMENT		ESTIMATED WEIGHT (LBS):			
REV	DESCRIPTION	DATE	DRAWN BY	CHECKED BY	APPROVED BY	DIMENSIONS OVER 10	MACHINED	WELDMENT	This document contains Independence Contract Drilling proprietary and confidential information. It is transmitted to the recipient for limited purposes only, and reminds the property of Independence Contract Drilling. It may not be reproduced, in whole or in part, without the written consent of Independence Contract Drilling, and must not be disclosed to persons not having need of such disclosure consistent with the purpose of the transmittal.  Corporate Office 20475 SH 249, Ste. 300 Houston, Texas 77070 Main: (281) 598-1230 www.icdrilling.com										MC	DATE:	THIRD ANGLE PROJECTION	SIZE:	SCALE (IND):	REV:	SHEET:	
0	ISSUED FOR CONSTRUCTION	03/05/2019	MC	JM	—	0	1.5	±0.008											±1/32	CHECKED BY:	DATE:	—	B	1:320	4	1 OF 1
1	MISC. UPDATES	05/09/2019	MC	JM	—	1.5	7.0	±0.010											±1/32	APPROVED BY:	DATE:	—				
2	EQUIPMENT DETAILS UPDATED	02/20/2020	MC	JM	—	7.0	20.0	±0.020											±1/16							
3	UPDATED RIG SPECS, REMOVED MP SPACER SKID	08/12/2021	JM	JM	—	20.0	50.0	±0.030											±1/8							
4	UPDATED RIG SPECS, ADDED 5.5" PIPE CAPACITIES	09/28/2021	JM	JM	—	50.0	120.0	±0.060	±3/16																	
5	UPDATED RIG SPECS, 5" & 5.5" PIPE CAPACITIES, 800K SETBACK	12/02/2024	DN	DN	—	120.0	240.0	±0.080	±1/4																	
—	—	—	—	—	—	BREAK ALL CORNERS, ON X 45° WELDING TIGHT 250 MAX. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE.																				
—	—	—	—	—	—	CHAMFER ALL TAPPED HOLES 45° TO FIRST TAPPED ROOT. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE.																				