


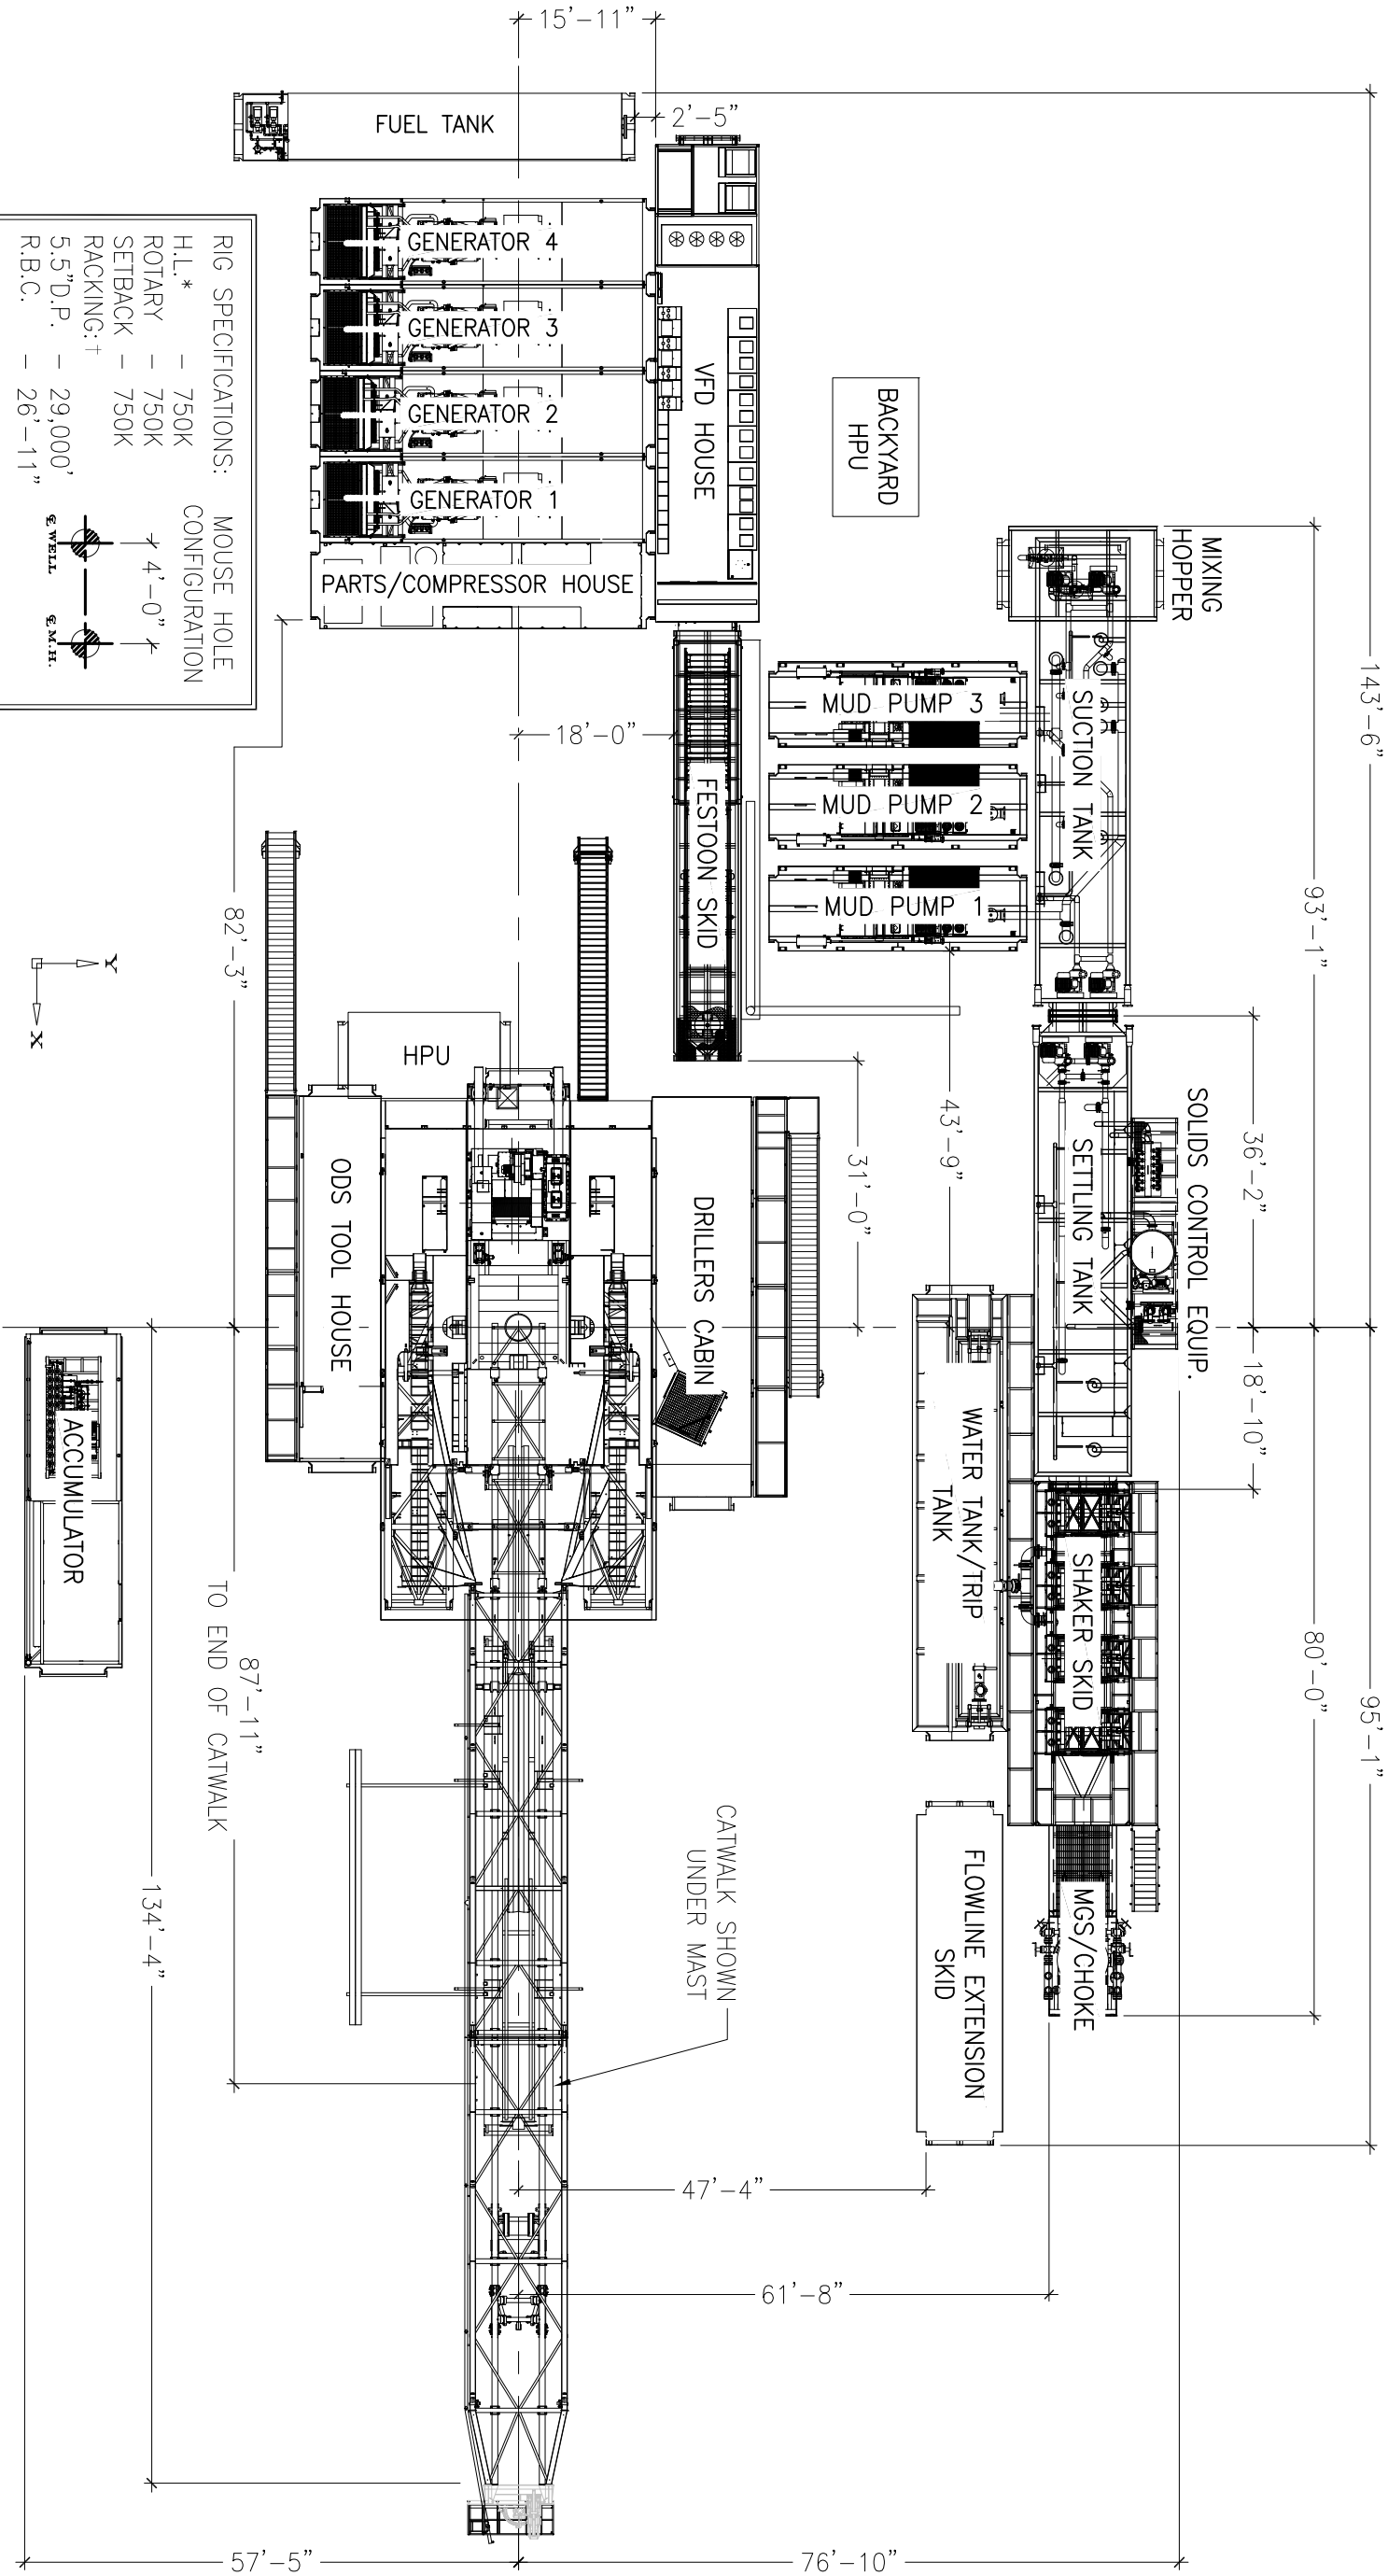

RIG SPECIFICATIONS: MOUSE HOLE CONFIGURATION

H.L.* - 750K
ROTARY - 750K
SETBACK - 750K
RACKING:†
5.5"D.P. - 29,000'
R.B.C. - 26'-11"

WALKING CAPACITY:‡ NOT TO SCALE
X-Axis - 175' MOUSE HOLE DEPTH
Y-Axis - 10' 65' AT 0° SLOPE

*1K=1000LB
†5"D.P. W/ 6 5/8" T.J., 5 1/2"D.P. W/ 6 5/8" T.J.
‡MAY BE INCREASED

REVISION HISTORY						UNSPECIFIED TOLERANCES			PROPRIETARY INFORMATION		CONTACT INFORMATION		DRAWN BY:			RIG 306	
REV	DESCRIPTION	DATE	DRAWN BY	CHECKED BY	APPROVED BY	DIMENSIONS OVER 10	MACHINED	WELDMENT	DN	DATE:	SIZE:	SCALE (IND):	ESTIMATED WEIGHT (LBS):	REV:	SHEET:		
A	ISSUED FOR REVIEW	10/21/2019	MC	JM	—	0	1.5	±0.008	±1/32	DN	05/06/2025	EQUIPMENT LAYOUT GENERAL ARRANGEMENT	5	1 OF 1			
B	3RD MUD PUMP ADDED	12/10/2019	MC	JM	—	1.5	7.0	±0.010	±1/32	DN	05/06/2025						
0	ISSUED FOR CONSTRUCTION	02/24/2020	MC	JM	—	7.0	20.0	±0.020	±1/16	DATE:	—						
1	UPDATED FORMATTING, ADDED RIG SPECS	06/16/2020	JM	JM	—	200	50.0	±0.030	±1/8	DATE:	—						
2	UPDATED RIG SPECS	07/22/2020	JM	JM	—	500	120.0	±0.060	±3/16	DATE:	—						
3	GENERATOR 4 ADDED, UPDATED RACKING CAPACITY	10/2/2020	JM	JM	—	1200	240.0	±0.080	±1/4	THIRD ANGLE PROJECTION	—	—	—	—			
4	UPDATED RIG SPECS	10/04/2021	JM	JM	—	BREAK ALL CORNERS, 1/8" X 5/16" MACHINE THRESH 250 MAX. CHAMFER ALL THREADED HOLES 45° TO FIRST THREADED ROOT. DIMENSIONS SHOWN ARE FOR GENERAL REFERENCE ONLY. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.									—	—	
5	CHANGED BACKYARD PLACEMENT & WALKING CAPACITY IN X-AXIS	03/25/2022	JM	JM	—	DISCLOSED TO PERSONS NOT HAVING NEED OF SUCH DISCLOSURE CONSISTENT WITH THE PURPOSE OF THE TRANSMITTAL.									—	—	
										 INDEPENDENCE CONTRACT DRILLING Corporate Office 20475 SH 249, Ste. 300 Houston, Texas 77070 Main: (281) 598-1230 www.icdrilling.com							