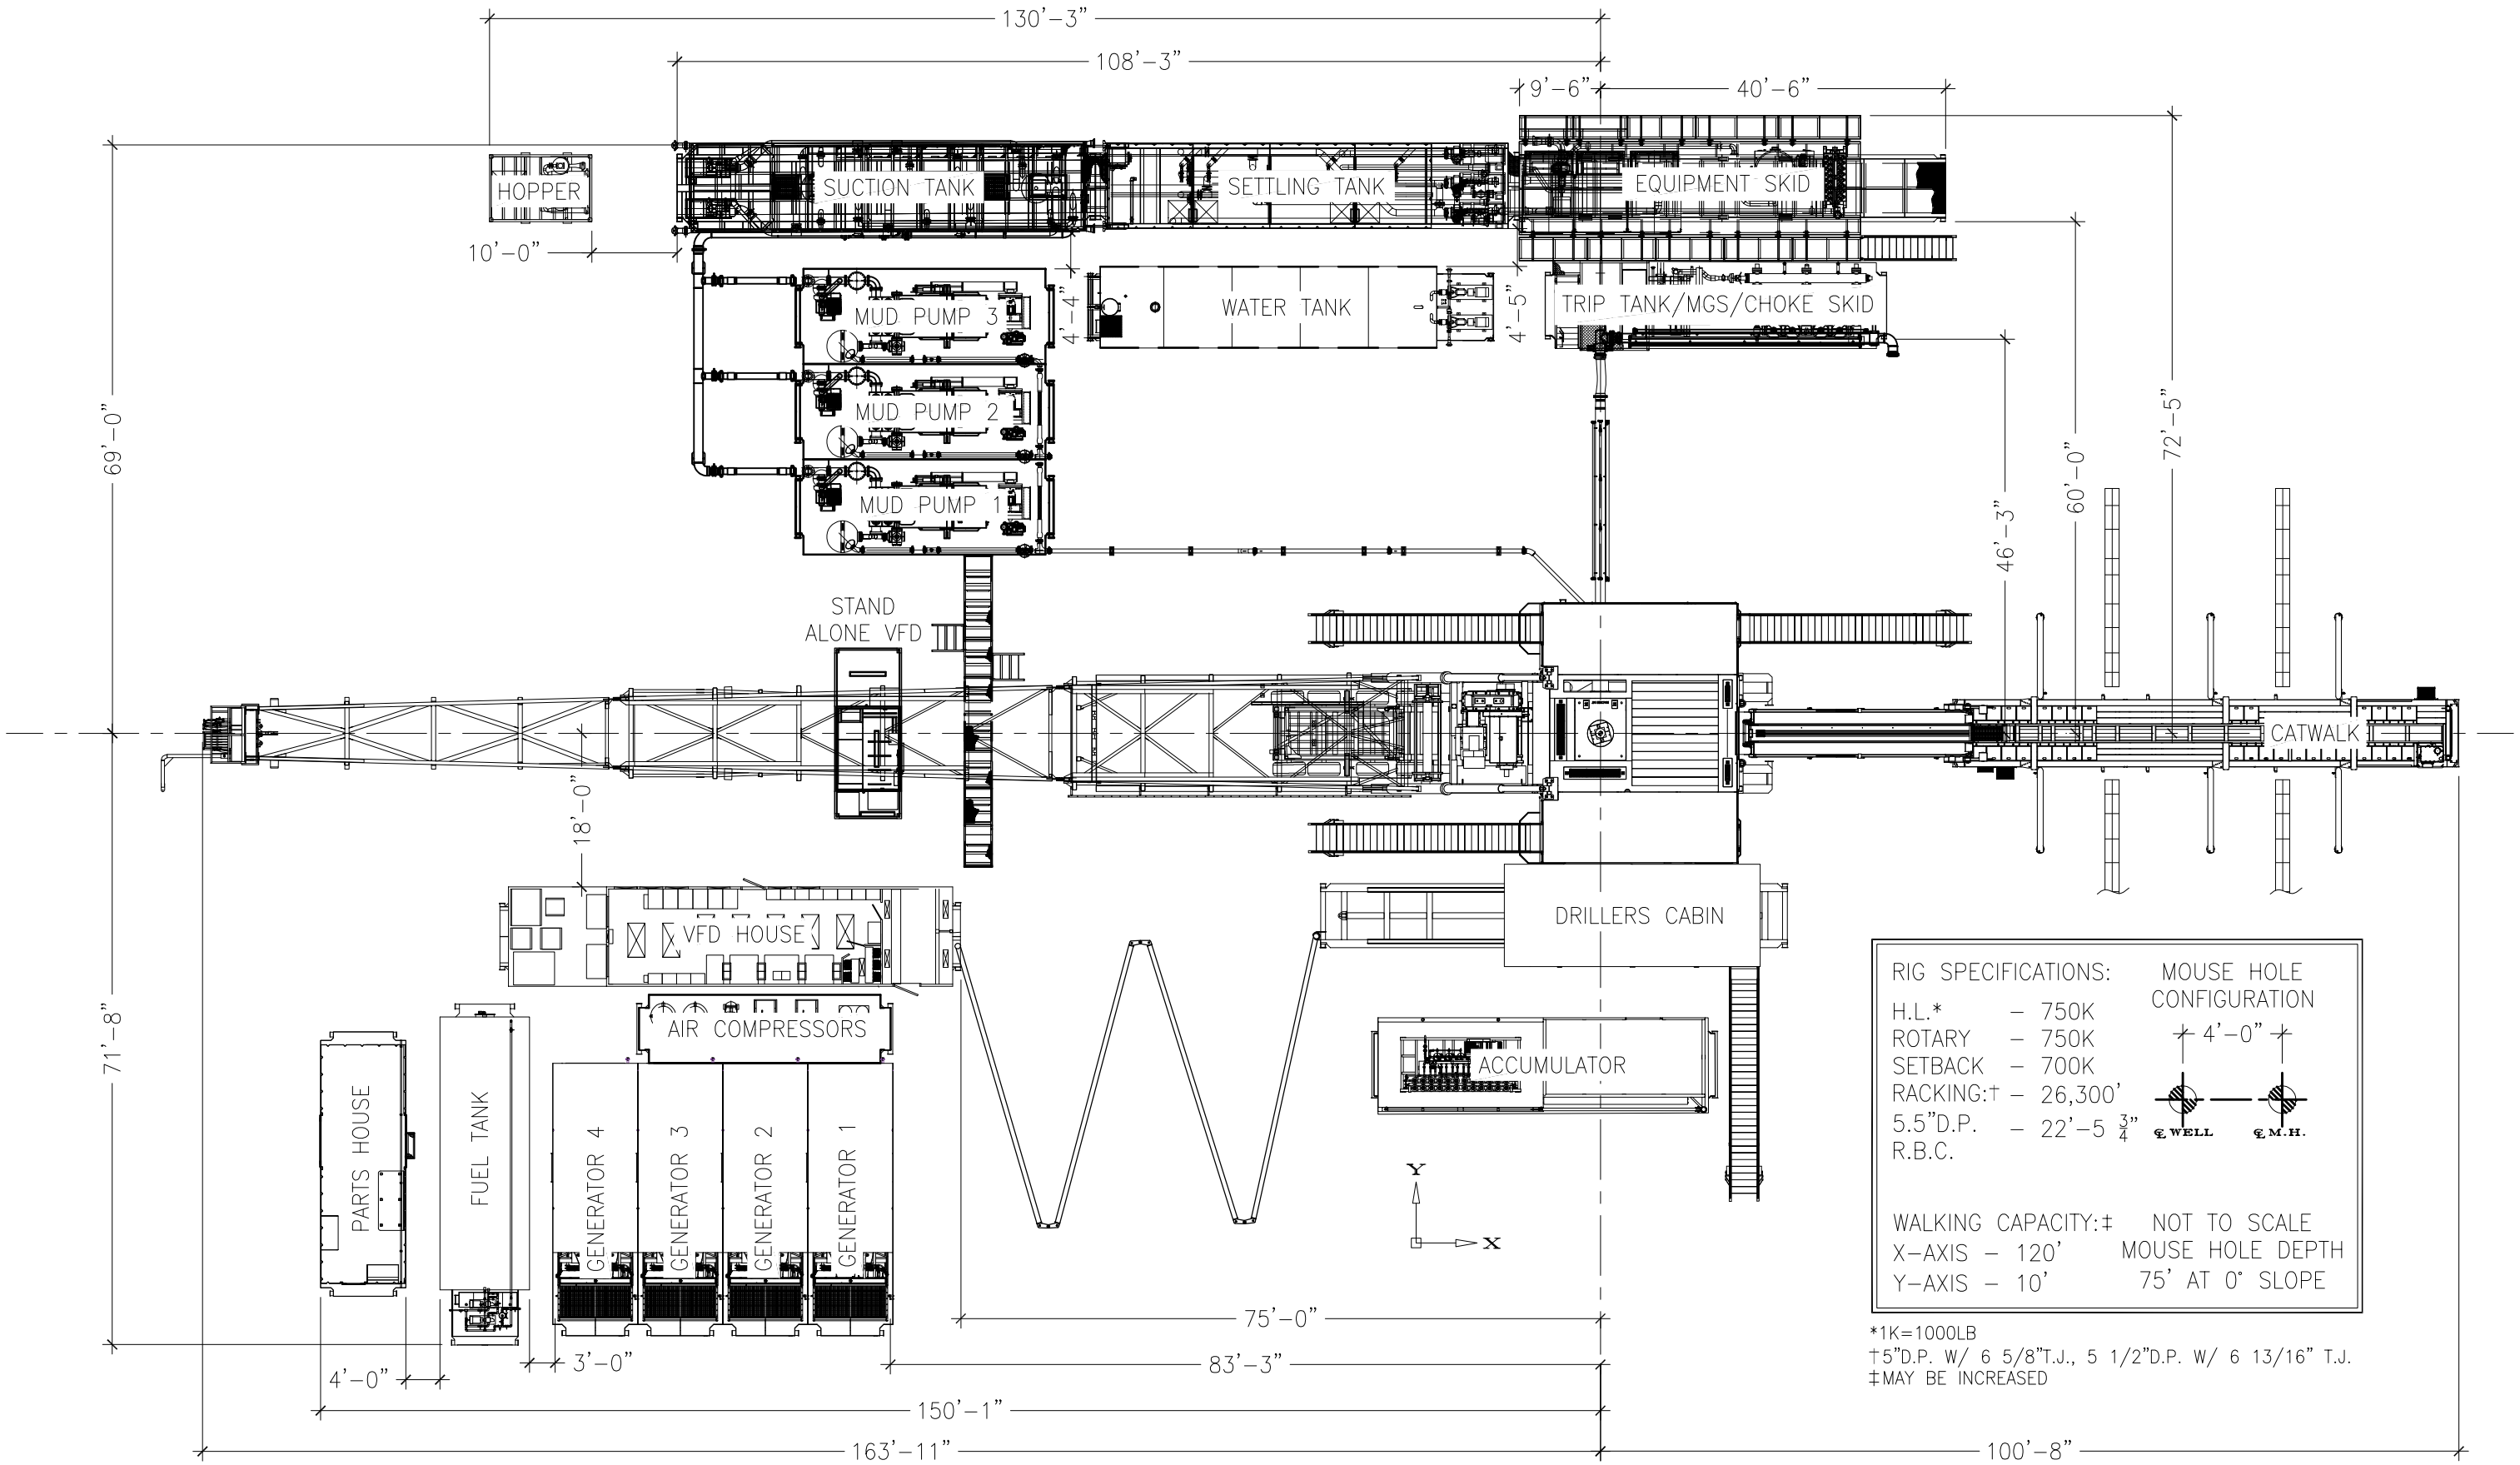

RIG SPECIFICATIONS:

H.L.* – 750K
ROTARY – 750K
SETBACK – 700K
RACKING:† – 26,300'
5.5"D.P. – 22'-5 3/4"
R.B.C.

MOUSE HOLE CONFIGURATION

4'-0"

℄ WELL ℄ M.H.

WALKING CAPACITY:‡
X-AXIS – 120'
Y-AXIS – 10'

NOT TO SCALE
MOUSE HOLE DEPTH
75' AT 0° SLOPE

*1K=1000LB
†5"D.P. W/ 6 5/8"T.J., 5 1/2"D.P. W/ 6 13/16" T.J.
‡MAY BE INCREASED

REVISION HISTORY

REV	DESCRIPTION	DATE	DRAWN BY	CHECKED BY	APPROVED BY
0	ISSUED FOR OFFICIAL USE	10/03/23	JM	JM	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–

UNSPECIFIED TOLERANCES

DIMENSIONS OVER	TO	MACHINED	WELDMENT
0	1.5	±0.008	±1/32
1.5	7.0	±0.010	±1/32
7.0	20.0	±0.020	±1/16
20.0	50.0	±0.030	±1/8
50.0	120.0	±0.060	±3/16
120.0	240.0	±0.080	±1/4
ANGLES		±0.1°	±0.5°

BREAK ALL CORNERS .06 X 45°. MACHINE FINISH 250 MAX. MACHINED DIAMETERS ON SAME CENTERLINE SHALL BE COAXIAL WITHIN ⌖ .020 DRILLED HOLE LOCATION ⌖ .060 CHAMFER ALL TAPPED HOLES 45° TO FIRST THREAD ROOT. DIMENSIONS MARKED ( ) ARE FOR GENERAL REFERENCE ONLY. NOT TO BE USED FOR CONSTRUCTION.

PROPRIETARY INFORMATION

This document contains Independence Contract Drilling proprietary and confidential information. It is transmitted to the recipient for limited purposes only, and remains the property of Independence Contract Drilling. It may not be reproduced, in whole or in part, without the written consent of Independence Contract Drilling, and must not be disclosed to persons not having need of such disclosure consistent with the purpose of the transmittal.

CONTACT INFORMATION

INDEPENDENCE CONTRACT DRILLING

Corporate Office
20475 SH 249, Ste. 300
Houston, Texas 77070
Main: (281) 598-1230
www.icdrilling.com

DRAWN BY: DN	DATE: 06/02/2025
CHECKED BY: DN	DATE: 06/02/2025
APPROVED BY: –	DATE: –

THIRD ANGLE PROJECTION

RIG 336
EQUIPMENT LAYOUT
GENERAL ARRANGEMENT

SIZE:	SCALE (UNO):	ESTIMATED WEIGHT (LBS):
B	1:225	–

DWG NO.	REV:	SHEET:
RIG334-GA-001	1	1 OF 1